


## Fiber Patchcord

Features	
Low Insertion Loss	
High Return Loss & High Repeatability	
Application	
LAN, Data network	
CATV Network	
Telecommunication	

Specifications:

Parameter		Value		
Connector Type		FC,SC,ST, LC, MU etc		
Operating wavelength (nm)		1310 or 1550	980 or 1060	780 or 850
Fiber Type		SMF-28e	HI1060 or HI1060Flex	HI780
Insertion loss (dB)		≤0.25	≤0.4	≤0.8
Return loss (dB)	UPC	≥50	≥50	≥50
	APC	≥60	≥60	≥60
Repeatability (dB)		≤0.1	/	/
Changeability (dB)		≤0.2	/	/
Durability		≥1000		
Max.Optical Power(mW)		500		
Operating temperature (°C)		-5 ~ + 75		
Storage Temperature (°C)		-40 ~ + 85		

Package Dimensions:

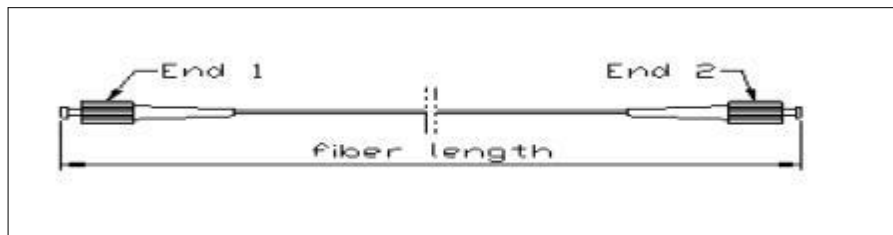

Ordering Information:

LT-JP	Wavelength	0000	Fiber Type	Pigtail Type	Length	Connector1	Connector2
	0780=780nm 0850=850nm 0980=980nm 1064=1064nm 1310=1310nm 1550=1550nm		1=SMF-28e 4=HI1060 Flex 5=HI1060 6=HI780	1=250umbare fiber 2=900um loose tube 3=3mm loose tube 4=2mm loose tube	H=0.5m 8=0.8m 1=1.0m 5=1.5m 2=2.0m 3=3.0m 4=4.0m A=2.5m B=5.0m	0=None 1=FC/UPC 2=FC/APC 3=LC/UPC 4=LC/APC 5=SC/APC 6=SC/UPC	0=None 1=FC/UPC 2=FC/APC 3=LC/UPC 4=LC/APC 5=SC/APC 6=SC/UPC