

532nm High Power In Line Optical Isolator


Features	
Low Insertion Loss High Isolation & Return Loss	
High reliability	
Application	
EDFA & Instrumentation & Fiber Amplifier	
Fiber Laser & Lab Research	

Specifications

Parameter	Value				
Center wavelength (nm)	532				
Bandwidth (nm)	± 10				
Insertion Loss @23°C	≤ 2.0 (typ.1.7)				
Peak Isolation (dB)	35~42				
Isolation at 23°C(dB)	≥ 25				
PDL(dB)	<table> <tr> <td>Polarization insensitive</td> <td>≤ 0.15</td> </tr> <tr> <td>Polarization sensitive</td> <td>≥ 23</td> </tr> </table>	Polarization insensitive	≤ 0.15	Polarization sensitive	≥ 23
Polarization insensitive	≤ 0.15				
Polarization sensitive	≥ 23				
Return loss (Input/output) (dB)	$\geq 50/50$				
Power handling CW (W)	0.3,0.5,1,2,3,5 or specify				
Fiber Type	PM460-HP fiber or specify				
Operating temperature (°C)	0 ~ +65				
Storage temperature (°C)	-20 ~ +85				
Package Dimension (mm)	118*37*35				

For device with connector, the IL will be 0.3dB higher will be 2dB lower and RL will be 5dB lower, the max handling power will be only 1W guaranteed

Package dimension

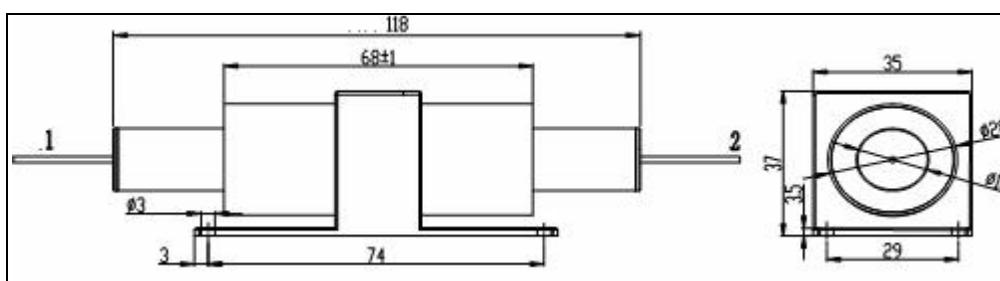

Ordering Information

HPIIS/H PSIS	Wavelength	Polarization Type	Power	Fiber Type	Pigtail Type	Length	Connector
HPIIS =Insensitive HPSIS =Sensitive	532=532nm	I= Insensitive S= Sensitive	0=300mW 1=500Mw 2=1W 3=2W 4=3W 5=5W S=specify	1=PM460-HP	1=250um bare fiber 2=900um loose tube 3=3mm loose tube	H=0.5m 8= 0.8m 1=1.0m 5=1.5m 2=2.0m 3=3.0m 4=4.0m A=2.5m	0=None 1=FC/UPC 2=FC/APC 3=LC/UPC 4=LC/APC 5=SC/APC 6=SC/UPC